


TecnoWall - panou termoizolant de perete


TECNOWALL

Prezentare


Versiuni standard

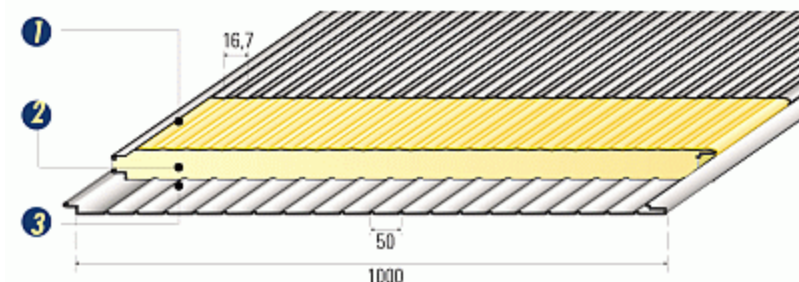


| | | |
|---|--|---|
| 1 | otel prevopsit 0,4 mm microcutat | A |
| 2 | poliuretan expandat de densitate înalta | |
| 3 | otel prevopsit 0,4 mm nervurat fin (pas 50 mm) | |

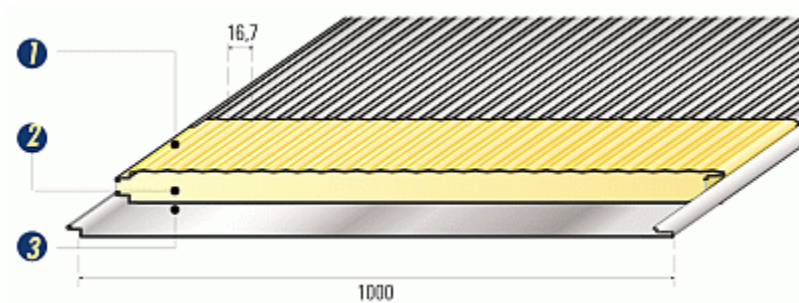

| | | |
|---|---|---|
| 1 | otel prevopsit 0,4 mm microcutat | B |
| 2 | poliuretan expandat de densitate înalta | |
| 3 | otel prevopsit 0,6 mm neted | |

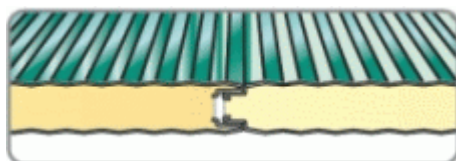

Detaliu de imbinare

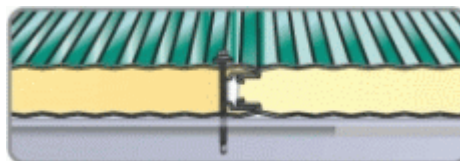

Detaliu de fixare

Grosimi disponibile:

- 25 mm
- 40 mm
- 50 mm
- 60 mm
- 80 mm
- 100 mm
- 150 mm

| | | | | Capacitate portanta admisibila kg/m ² Distanta între reazeme | |
|---|-------------------------------|-----------------------|-------------------------|---|-------|
| Grosime panou (mm) exclus ondulatie | Greutate kg/m ² | W/m ² k | kcal/m ² h°C | 1,5 m | 2 m |
| 25 | 7,82 | 0,80 | 0,67 | 221* | 157* |
| 40 | 8,42 | 0,48 | 0,41 | 196 * | 180 * |
| 50 | 8,82 | 0,39 | 0,33 | 217 * | 205 * |
| 60 | 9,22 | 0,33 | 0,28 | 250 * | 220 * |
| 80 | 10,02 | 0,27 | 0,21 | 280 * | 250 * |
| 100 | 10,82 | 0,23 | 0,17 | 300 * | 275 * |
| 150 | 12,7 | 0,14 | 0,12 | 485 * | 345 * |

*date referitoare la panoul cu partea superioara si inferioara din otel prevopsit grosime 0,5 mm

Culori disponibile

| | | | | |
|-----------------|------------------|-----------------|-----------------|-----------------|
| RAL 3000 | RAL 9006 | RAL 5010 | RAL 9002 | RAL 9010 |
| Rosu aprins | Argintiu deschis | Albastru | Alb gri | Alb alimentar |