

**white range**

<b>white-grey</b>	<b>white 9002</b>	<b>white 9010</b>	<b>white 21</b>	<b>Pirineo white</b>
●  smooth or stucco embossed	● <b>SIMILRAL9002</b> ps smooth	● <b>SIMILRAL9010</b> ps smooth	● <b>SIMILRAL7035</b> ps smooth or stucco embossed	●  smooth

**cream range**

<b>cream</b>	<b>ivory</b>	<b>sand</b>
● <b>SIMILRAL1014</b> ps smooth or stucco embossed	● <b>SIMILRAL1015</b> ps smooth	●  smooth

**green range**

<b>olive green</b>	<b>mint green</b>	<b>navarra green</b>	<b>reseda green</b>	<b>moss green</b>
● <b>SIMILRAL6003</b> ps smooth	● <b>SIMILRAL6029</b> ps smooth	●  smooth	● <b>SIMILRAL6011</b> ps smooth	● <b>SIMILRAL6005</b> ps smooth

**red range**

<b>siena red</b>	<b>teja red</b>	<b>firey red</b>
● <b>SIMILRAL3009</b> ps/pvdf smooth	●  smooth	● <b>SIMILRAL3000</b> ps smooth

**brown range**

<b>dark brown</b>
● <b>SIMILRAL8014</b> ps smooth

**note:**

- The most suitable covering must be chosen according to the environmental characteristics of where the sheet is to be installed (see back cover).
- For colour RAL 9006 (metallic silver) a slight change in shade may be noted between different production batches and/or different production times.

**grey range**

<b>silver metallic</b>	<b>slate grey</b>	<b>dark grey</b>	<b>merlin grey</b>	<b>goosewing grey</b>
● <b>SIMILRAL9006</b> ps smooth	● <b>SIMILRAL7015</b> ps smooth	● <b>SIMILRAL7022</b> ps smooth	●  stucco embossed	●  stucco embossed

**blue range**

<b>lake blue</b>	<b>mid-blue</b>	<b>dark blue</b>	<b>gentian blue</b>
●  smooth	● <b>SIMILRAL5024</b> ps smooth	● <b>SIMILRAL5008</b> ps smooth	● <b>SIMILRAL5010</b> ps smooth

**isodomus range**

<b>antique red</b>	<b>antique grey</b>	<b>antique green</b>
●  satinised smooth	●  satinised smooth	●  satinised smooth

**special range**

<b>white-grey aluminium</b>	<b>siena red aluminium</b>	<b>dark brown aluminium</b>	<b>natural aluminium</b>	<b>natural copper</b>
●  smooth	● <b>SIMILRAL3009</b> ps smooth	● <b>SIMILRAL8014</b> ps smooth	●  smooth or stucco embossed	●  smooth

<b>natural stainless steel</b>	<b>top class white</b>
●  smooth	●  smooth

**special precautions**

Care must be taken not to knock or scratch the covering or to deform the sheet edges and micro-grain. In the event of scratches, these can be touched up with paint. The fixing holes and any cuts in length or width may produce chips that could stick to the covering, both due to their shape and the increase in temperature. Any chippings must therefore be removed as quickly as possible to stop them from rusting and damaging the covering.

**warning**

The colours shown in this leaflet are interpretations of RAL colours; exposure to light may cause them to undergo some colour change over time.

**storage**

These products must be transported and stored in conditions that assure their protection from humidity. Storage must be done in a ventilated shelter. The packages must be slightly leaned to allow them to dry quickly; they must be raised off the ground to ensure that the material is well-aired and to stop moisture from stagnating and causing any damage to the panel covering. If the panels have been covered with a temporary protective film, storage must be done away from direct and prolonged sunlight. The protective film must be removed quickly, during panel installation. Generally, concerning the storage, transportation and handling of the panels, the AIPPEG recommendations should be followed. ISOPAN has been an AIPPEG member since its foundation.

**covering**

**covering warranty**


A written, formal warranty of durability of the covering can be supplied, providing that all the conditions (environmental, morphologic, climatic, correct installation, etc) specified in the warranty itself are respected. The durability of the covering also depends clearly on the type of covering chosen, as well as the final destination of the material.



**product cleaning and maintenance**

If the covering requires cleaning, the type of product used for cleaning and the application methods must be compatible with the chosen covering. The maintenance of pre-painted surfaces must respect the AIPPEG recommendations. The ISOPAN technical department is at the disposal of all customers for any consultation and queries.

**customised coverings**

While not kept in stock, many other colours can be supplied. On request, we can also provide a master colour of any shade and/or paint that you may have chosen. The colour solutions are however bound by minimum production quantities (minimum acceptable batches).

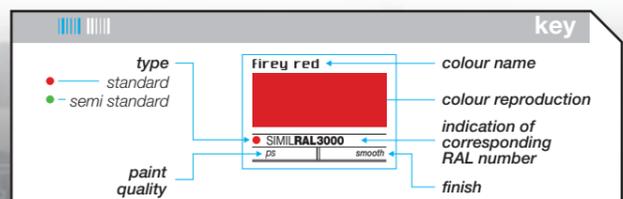

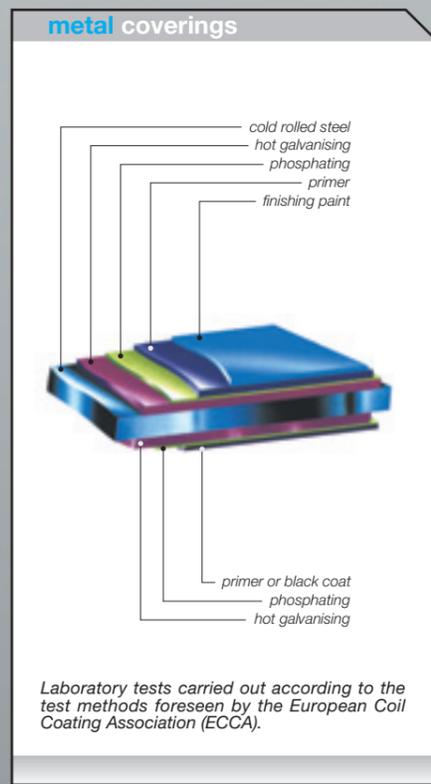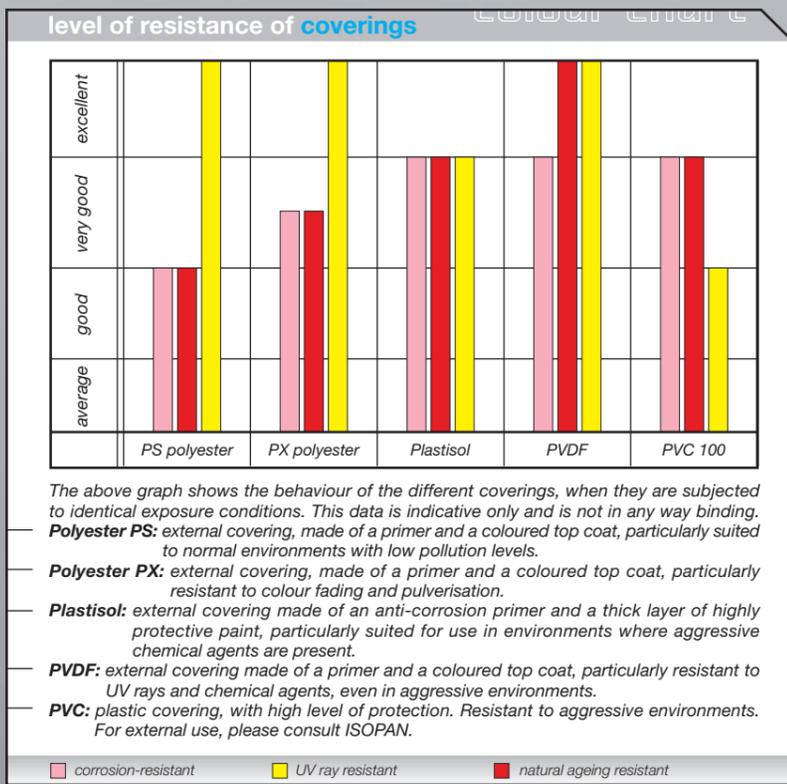

### guide to the choice of covering

#### Choice in relation to exposure

TYPE	EXTERNAL				INTERNAL			
	RURAL NON POLLUTING	INDUSTRIAL AND URBAN NORMAL	HARD	SEA	MIXED/SPECIAL	CLEAN/ DRY	DAMP	HOSTILE
PS polyester	■	■	■	■	■	●	■	■
PX silicon polyester	■	■	■	■	■	●	■	■
PLASTISOL	●	●	●	●	●	●	●	●
PVDF	●	●	●	●	●	●	●	●
PVC					●	●	●	●

● ideal covering    ● ideal choice to be agreed following consultation with the supplier    ■ suitable covering



<p><b>ISOPAN S.p.A.</b> TREVENZUOLO branch Via Giona, 5 I - 37060 TREVENZUOLO (VR) Tel. (39) 045 7359111 Fax (39) 045 7359100 isopan@isopan.it</p>	<p><b>ISOPAN S.p.A.</b> PATRICA headquarters S.P. Morolense I - 03010 PATRICA (FR) Tel. (39) 0775 2081 Fax (39) 0775 293177 isopan@isopan.it</p>	<p><b>ISOPAN FRANCE</b> Zac du Parkile - BAT 2 164 Avenue Joseph Kessel F - 78960 VOISINS LE BRETONNEUX Tel. (33) 1 30575578 - Fax (33) 1 30575097 isopan@worldonline.fr</p>	<p><b>ISOPAN IBERICA SL</b> Polígono Industrial de Constantí Avda. de les Punes, parcela 23 E - 43120 Constantí (TARRAGONA) Tel. (34) 977524546 Fax (34) 977524597 isopan@isopan.es</p>
--	--	--	---



www.isopan.it

